

1 Hardware Connection



2 Physical Appearance

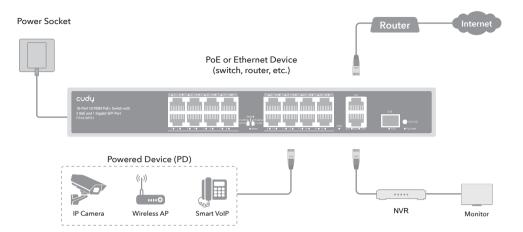

Back board



3 Specifications

Network Protocol	IEEE802.3 / IEEE802.3u / IEEE802.3z	
	EE802.3x / IEEE802.3ab / IEEE802.3af/at	
PoE Standard IE	IEEE802.3at (30W) and IEEE802.3af (15.4w)	
Optical Media N	ultimode fiber:50/125,62.5/125,100/140um	
S	ngle mode fiber:8/125、8.7/125,9/125,10/125um	
AC Input Voltage A	AC100~240V	
POE Voltage D	DC 44-57 V	
Power Pin P	Power over spare pairs 1/2(+) , 3/6 (-)	
Network Medium 1	DBASE-T: Cat 3,4,5 UTP(≤100 meter)	
1	00BASE-TX: Cat5 or more UTP (≤100 meter)	
1	000Base-TX: Cat5 or more UTP/STP(≤100 meter)	

Output	52V ~ 3.8A	
Total Power	180W	
Dimension(L×W×H)	320mm×207mm×45mm	
Bandwidth	9.2Gbps (non-blocking)	
Forwarding Rate	6.8Mpps	
Packet Buffer	3Mbit	
MAC Address	2K MAC address table	
Transfer Mode	Store-And-Forward	
Working Temperature	-10~50°C	
Storage Temperature	-40~70°C	
Working humidity	10%~90%, non-condensing	
Storage humidity	5%~95%, non-condensing	
	·	

4 DIP Explanation

	Downlink designated ports are isolated
Port Isolation	from each other, only transmit data with
	the uplink port.
Standard Switch	All ports communicate freely
Link Extension	The specified port speed drops to 10Mbps/s,
LITIK EXTENSION	max PoE transmission is 250 meters.

5 LED and Interface Explanation

PWR	On	Equipment powered on
	Off	Equipment power off
Mode	On	VLAN mode
	Flashing	Extend mode
	Off	Default mode
1-19 Green	On	Link connectivity
	Flashing	Data transmission
	Off	Link abnormality
1-16Yellow (POE)	On	POE power supply is normal
	Off	POE not powered
POE MAX (Green)	Off	Indicates that PoE power usage is less than 90%
	Flashing	Indicates PoE power usage of 90% ≤ P ≤ 95%
	On	Indicates PoE power usage of 95% <p<100%< td=""></p<100%<>
POE LED Button	Dual color light selection: default green (link data), switch yellow light (POE)	

EU declaration of conformity

Cudy hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/30/EU, 2014/35/EU, 2009/125/EC and 2011/65/EU. The original EU declaration of conformity may be found at http://www.cudy.com/















Quick Installation Guide

Model: FS1018PS1



